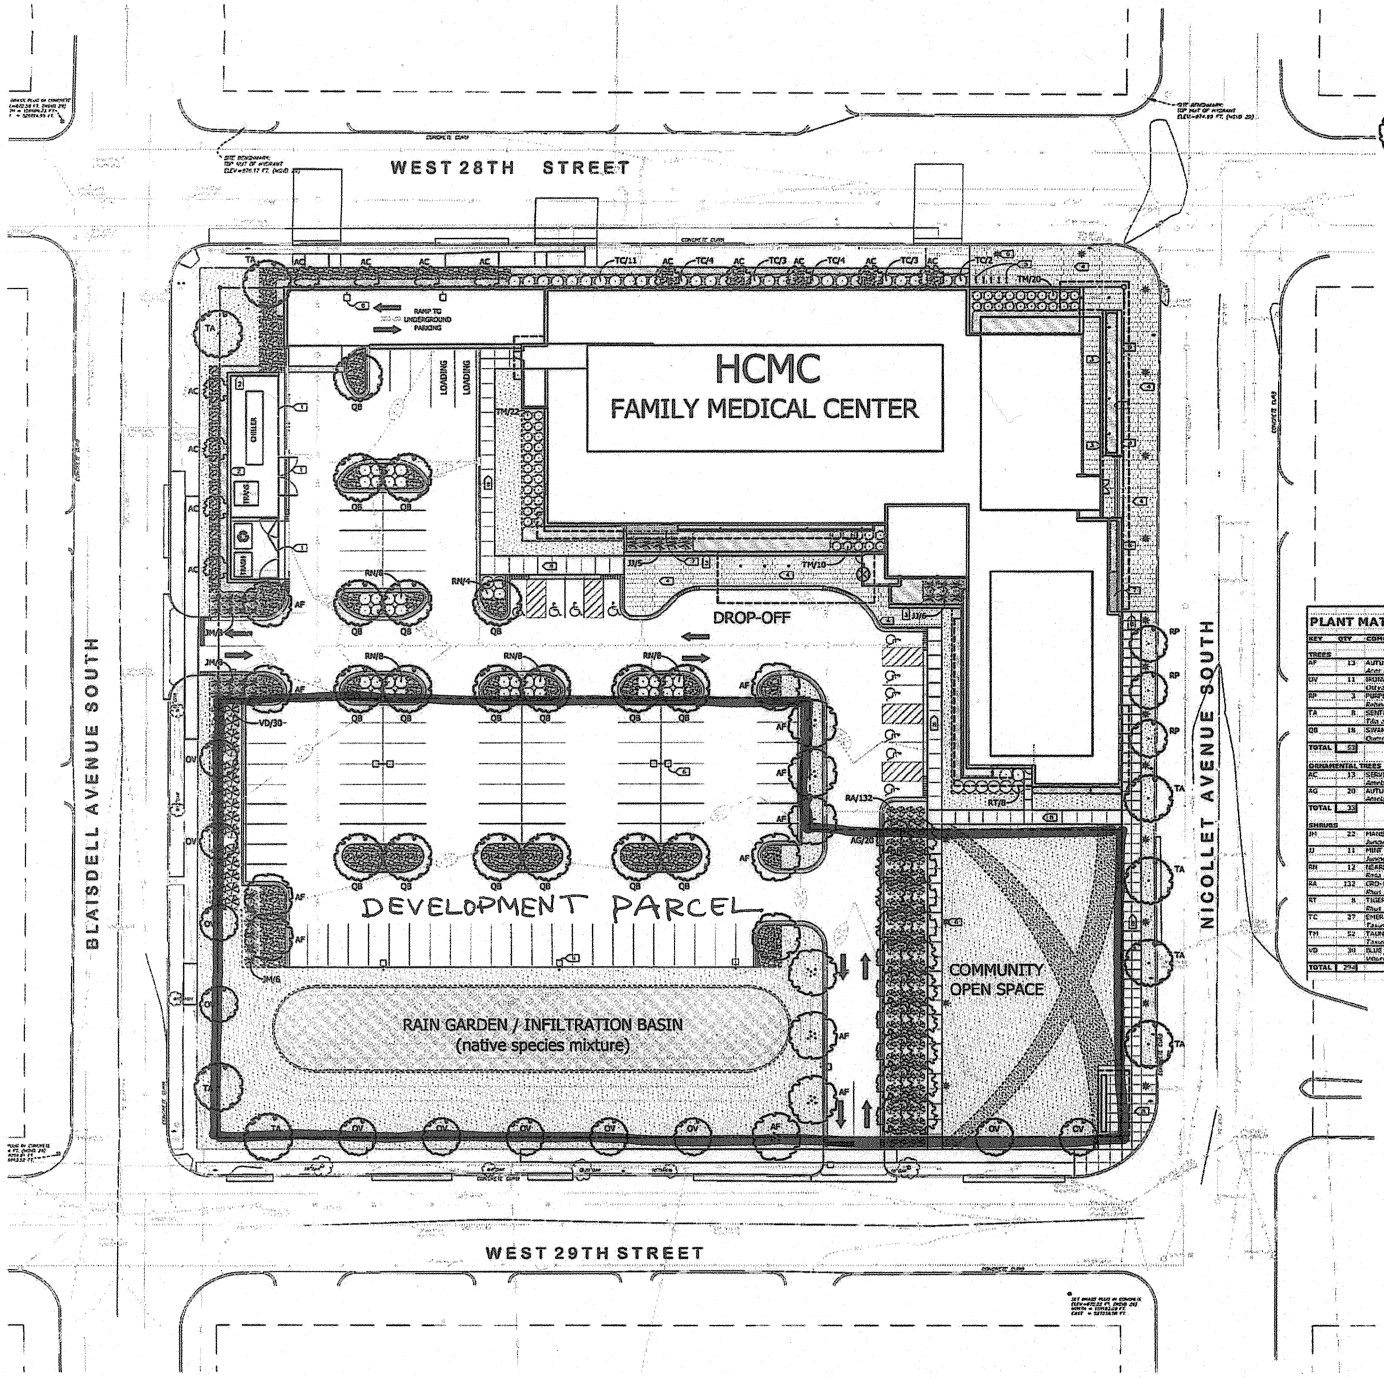

LEGEND

- DECIDUOUS TREE
- ORNAMENTAL TREE
- DECIDUOUS SHRUB
- CONIFEROUS SHRUB
- PERENNIAL MASS/GROUP
- ZZ/11 PLANT LABEL (SPECIES/QUANTITY)
- TURF (SODDED)
- GARDEN PATH SURFACE (CRUSHED STONE, ¾" MINUS)
- DECORATIVE LANDSCAPE STONE (4"-8" LIMESTONE OR FIELDSTONE)
- LANDSCAPE EDGING

PLANT MATERIALS SCHEDULE

KEY	QTY	COMMON / BOTANICAL NAME	SIZE	ROOT	SPACING	REMARKS
TREES						
AF	13	AUTUMN BLAZE MAPLE *Acer x freemanii 'Jeffersred'*	12' ht.	BB	AS SHOWN	Clump form
OV	11	IRONWOOD *Ostrya virginiana*	2" cal.	BB	AS SHOWN	
RP	3	PURPLE ROBE LOCUST *Robinia pseudoacacia 'Purple Robe'*	2" cal.	BB	AS SHOWN	
TA	8	SENTRY AMERICAN BASSWOOD *Tilia americana 'McSentry'*	2 1/2" cal.	BB	AS SHOWN	
QB	18	SWAMP WHITE OAK *Quercus bicolor*	3 1/2" cal.	BB	AS SHOWN	
TOTAL	53					
ORNAMENTAL TREES						
AC	13	SERVICEBERRY 'RAINBOW PILLAR' *Amelanchier canadensis 'Cardinal'*	6' ht.	BB	AS SHOWN	
AG	20	AUTUMN BRILLIANCE SERVICEBERRY *Amelanchier x grandiflora 'Autumn Brilliance'*	2" cal.	BB	AS SHOWN	tree form
TOTAL	33					
SHRUBS						
JH	22	HANDY JUNIPER *Juniperus chinensis 'Hetzii'*	#3	CTNR	AS SHOWN	
JJ	11	MINT JULEP JUNIPER *Juniperus chinensis 'Mint Julep'*	#3	CTNR	AS SHOWN	
RN	12	NEARLY WILD ROSE *Rosa rubrifolia 'Nearly Wild'*	#2	CTNR	AS SHOWN	
RA	132	GRO-LOW FRAGRANT SUMAC *Rhus aromatica 'Gro-Low'*	#2	CTNR	AS SHOWN	
RT	8	TIGER EYE SUMAC *Rhus typhina 'Tiger Eyes'*	#2	CTNR	AS SHOWN	
TC	27	EMERALD SPREADER YEW *Taxus candidata 'Hicksii'*	#2	CTNR	AS SHOWN	
TM	52	TAUNTON YEW *Taxus x media 'Taunton'*	#2	CTNR	AS SHOWN	
VD	30	BLUE MUFFIN VIBURNUM *Viburnum dentatum 'Christom'*	#5	CTNR	AS SHOWN	
TOTAL	252					

Hennepin County Medical Center

HENNEPIN COUNTY
MEDICAL CENTER
FAMILY MEDICAL CENTER
MINNEAPOLIS, MINNESOTA

KEY NOTES:

1. DECORATIVE METAL SCREEN-FENCE AND GATE, 8' HEIGHT
2. ARCHITECTURAL SCREEN WALL, 10' HEIGHT
3. PRECAST CONCRETE SEAT/PLANTER WALL, 18"-24" HEIGHT
4. DECORATIVE CONCRETE PAVERS
5. BIKE RACKS, IN-GROUND ANCHORED.
6. SITE LIGHT, REFER TO ELECTRICAL
7. AREA WELL, CONCRETE CURB-EDGE W/STEEL GRATE COVERING
8. CONCRETE SIDEWALK

NOTES:

ALL PLANTED AREAS, INCLUDING PLANTERS, TO HAVE 3" DEPTH SHREDDED HARDWOOD MULCH

ALL PLANTERS AND PLANTED AREAS TO HAVE 24" DEPTH MIN. HIGH QUALITY PLANTING SOIL

ALL TREES PLANTED IN TURF AREAS TO HAVE 3' RING OF SHREDDED HARDWOOD MULCH AT BASE, 3" DEPTH PULLED AWAY FROM TRUNK

REVISION HISTORY - THIS SHEET
△
△
△
△
△
△
△
△

HGA
Architecture | Engineering | Planning
Hammel, Green and Abrahamson, Inc.
701 Washington Avenue North • Minneapolis, Minnesota 55401
Telephone 612.758.1500 Facsimile 612.758.4199

NOT FOR CONSTRUCTION

LANDSCAPE PLAN

0 10' 20' 40'

CONTR. NO.	0630-031-00
SCALE	1"=20'
DATE	NOVEMBER 12, 2008
DRAWN	TEH

PLANNED UNIT DEVELOPMENT

L100

© COPYRIGHT HAMMEL, GREEN AND ABRAHAMSON, INC.