


ENDS SECURELY CLOSED TO PREVENT
LOSS OF OPEN GRADED AGGREGATE FILL
SECURED WITH 50 PSI. ZIP TIE

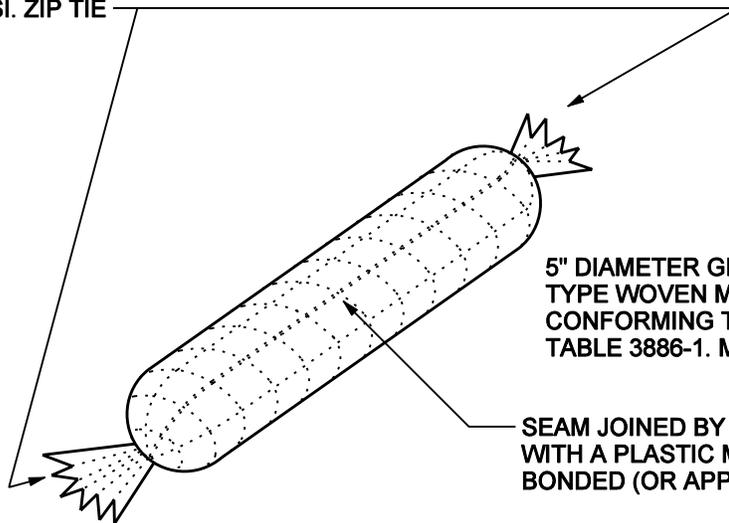


5" DIAMETER GEOTEXTILE SOCK,
TYPE WOVEN MONOFILAMENT
CONFORMING TO MNDOT SPEC. 3886,
TABLE 3886-1. MACHINE SLICE

SEAM JOINED BY TWO ROWS OF STITCHING
WITH A PLASTIC MESH BACKING OR HEAT
BONDED (OR APPROVED EQUIVALENT)

FILL ROCK LOG WITH 45 LBS.
OF OPEN GRADED AGGREGATE
CONSISTING OF SOUND, DURABLE
PARTICLES OF CRUSHED QUARRY
ROCK OR GRAVEL CONFORMING
TO THE FOLLOWING GRADATION

INLET PROTECTION
WITH FILTER LOG
DO NOT USE IN LIVE TRAFFIC AREAS

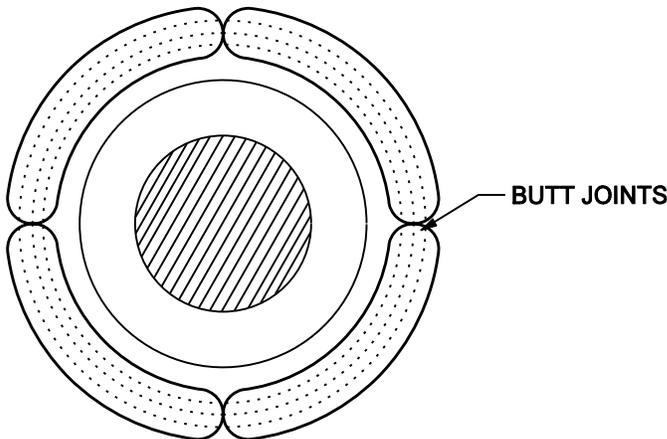

BUTT JOINTS

GRADATION	
SIEVE SIZE	PERCENT PASSING
1 1/2 INCH	100
1 INCH	95-100
3/4 INCH	65-95
3/8 INCH	30-65
NO. 4	10-35
NO.10	3-20
NO. 40	0-8
NO. 200	0-3

NOTE: CRUSHED CONCRETE OR
BITUMINOUS SHALL NOT BE USED
FOR OPEN GRADED AGGREGATE.

PAYMENT SHALL INCLUDE ALL MATERIALS,
FILLING OF LOG, PLACEMENT, MAINTENANCE,
& REMOVAL. 80% OF BID PRICE SHALL BE
PAID UPON PROPER PLACEMENT WITH THE
FINAL 20% PAID UPON REMOVAL.

FILTER LOGS MNDOT SPEC. 3897

STRAW BIOROLL
WOOD FIBER BIOROLL
COMPOST LOG

GRAIN AND SEED FREE OF WEEDS, 6-9 MONTH POLYPROPYLENE NETTING
EXCELSIOR FIBER LOG, 6-9 MONTH POLYPROPYLENE NETTING
30-40% WEED FREE COMPOST (3890, GRADE 2), 8" DIAMETER
GEOTECHNICAL CYLINDRICAL BAG
4"-6" DIAMETER, SEE SIEVE SIZE CHART ABOVE

ROCK LOG

FIBER LOG MNDOT SPEC. 3895
12" DIAMETER COCONUT FIBER (COIR),
OUTER COIR NETTING REQUIRED, MINIMUM 5 YEAR LIFE

MINNEAPOLIS CUSTOM
MNDOT SPEC. REF. 3897
NOT TO SCALE



MINNEAPOLIS
DEPARTMENT OF PUBLIC WORKS

DRAWN: DCD

DATE: 4/07

APPROVED: HRS

DATE: 4/07

SEDIMENT CONTROL -- FILTER LOG

STANDARD
PLATE
NO.
SEWR-8008